



---

# Bautech COLORCOAT HP

One component hybrid  
polyurethane resin


---

**Hydrophobicity**

Class W3

**Chemical resistance**

Tested to 72 standard chemicals

**Substrate humidity**

&lt; 8%

**Easy application**

Easy to apply (roller or brush)

**USES**

- Car parks
- Garages
- Staircases
- Stairs
- Walls


**BENEFITS**

- Applied to vertical and horizontal surfaces
- Wide range of colours (RAL)
- Thermal resistance
- High hydrophobicity
- No need of priming
- Quick drying time (approx. 2-4 hours)
- Possibility to create antislip system
- Easy to clean and maintain




## AVAILABLE SYSTEMS

### BAUTECH COLORCOAT in two coats

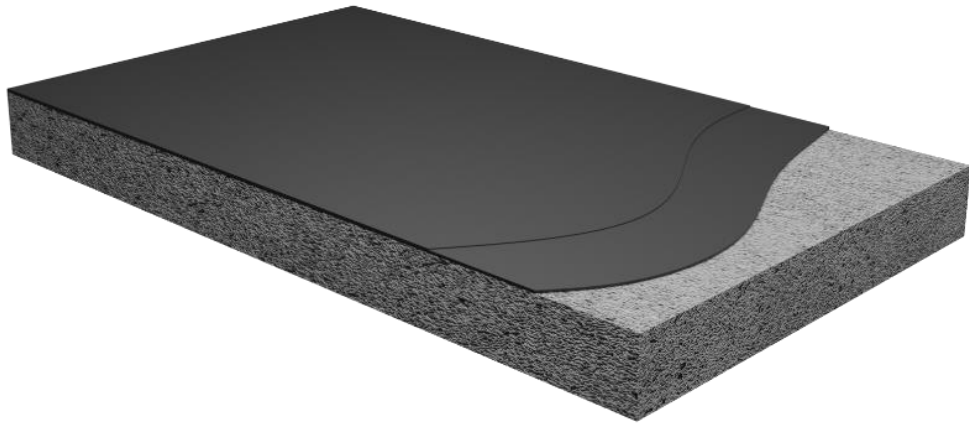


- Colorcoat HP
- Colorcoat HP approx. 0.4 kg/m<sup>2</sup> (for 2 coats)

### BAUTECH COLORCOAT slip resistant

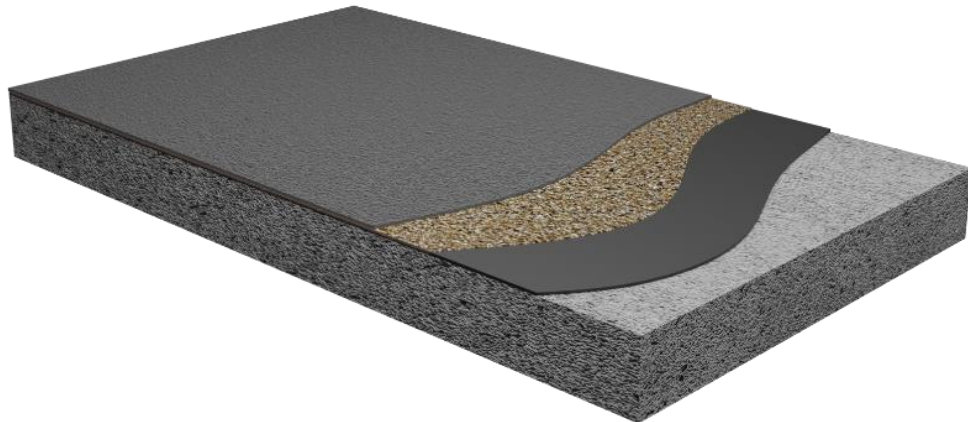

- Colorcoat HP
- Quartz sand (0.2-0.4 mm) approx. 3 kg/m<sup>2</sup>
- Colorcoat HP approx. 0.6 kg/m<sup>2</sup> (for I and II coat)
- *Colourcoat HP - 3-rd coat as an option*

### BAUTECH COLORCOAT with colour chips

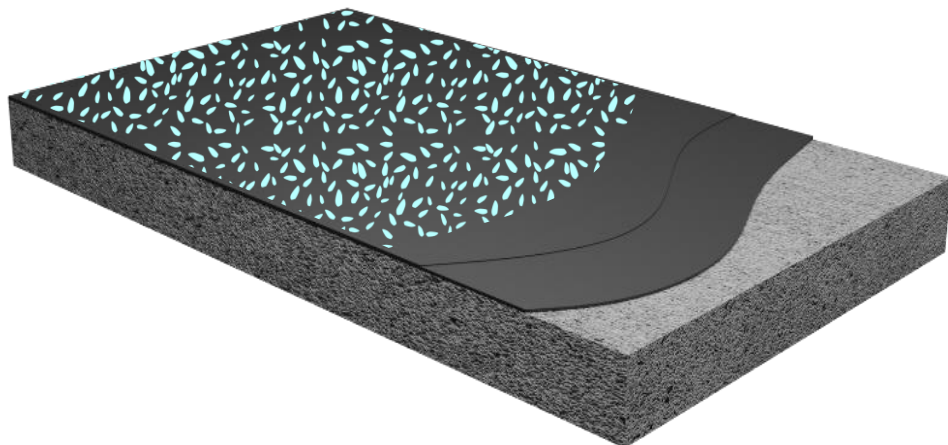

- Colorcoat HP
- Colorcoat HP approx. 0.4 kg/m<sup>2</sup> (for 2 coats)
- Colour chips approx. 0.01 kg/m<sup>2</sup>
- Baupur 600 HP varnish approx. 0.03 kg/m<sup>2</sup>

# TECHNICAL DATA



<b>CE</b>	EN 1504-2: 2004
Abrasion resistance (Taber test)	< 3000 mg
CO <sub>2</sub> permability	Sd > 50 m
Vapour permeability	Class I
Water absorption and permeability	< 0,1 kg/m <sup>2</sup> *h <sup>0.5</sup>
Impact resistance	> 20 Nm (class III)
Pull of strength	≥ 2.0 N/mm <sup>2</sup>
Fire classification (EN 13501-1)	E

## Other decorative systems

**Creativo One**

**Creativo Wall**

**Ultima**

**Ultima SLC**

**BAUTECH Group**  
25 Staszica str  
05-500 Piaseczno, Poland  
[www.bautech.eu](http://www.bautech.eu)

